
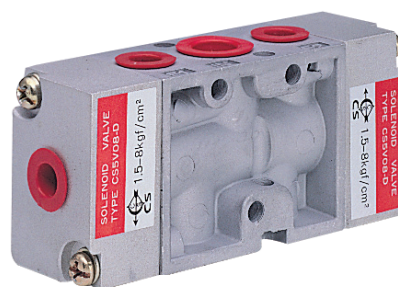


先導式系列

型號	配管 口徑	有效斷面積 (平方毫米)	CV 值	流體 溫度 (℃)	密封件 材質	使用壓力範圍 kg/cm² (bar)	重量 (公斤)
						空氣	
CST-5V06-S	1/8 "	20	1.12	-10℃	丁腈橡膠	1.5-8	0.20
CST-5V08-S	1/4 "	22	1.23	}		1.5-8	0.20
CST-5V06-D	1/8 "	20	1.12			1.5-8	0.25
CST-5V08-D	1/4 "	22	1.23			60℃	1.5-8

訂購方式:

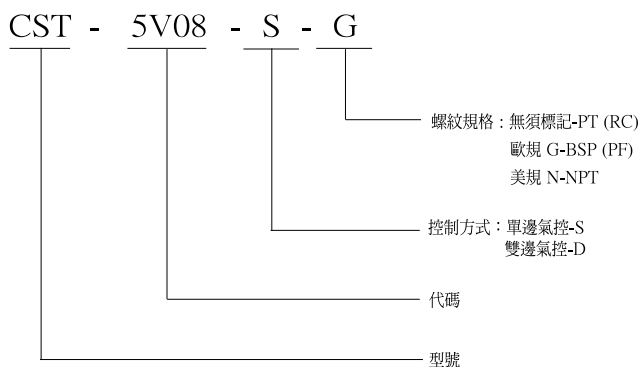

使用須知:

1. 閥體配管可水平或垂直安裝.
2. 應答速度15~20毫秒.
3. 附手動裝置.
4. CST-5V08 系列排氣孔為1/8"英吋.
5. 氣缸選擇建議 Ø20~Ø80毫米缸徑.

不適用流體:

1. 腐蝕性氣體.

